

VRLA sealed lead acid batteries ASTERION DT series are specifically designed for use in low current systems. They are manufactured using AGM technology (electrolyte absorbed in a fiberglass separator).

ASTERION DT series batteries comes with a good price-performance ratio, which leads to the widespread use of the series in fire alarms and other security systems.

Meeting the international security standards, they are recommended for use in access control and management systems.



Battery construction

Element	Positive plate	Negative plate	Case	Lid	Valve	Terminal	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS		Rubber	Copper	Fiberglass	Acid

Specifications

Nominal voltage.....12 B
 Cell.....6
 Design life.....5 years
 Nominal capacity (25°C)
 20 hours rate (1,65 A; 1,75 V/cell).....33 Ah
 10 hours rate (3,16 A; 1,75 V/cell).....31,6 Ah
 5 hours rate (6,24 A; 1,70 V/cell).....31,2 Ah
 Self-discharge.....3% capacity per month 25°C
 Internal resistance (25°C).....9 mΩ

Operating temperature range

Discharge..... -15÷50°C
 Charge..... -10÷50°C
 Storage..... -20÷50°C
 Maximum discharge current (25°C).....440A (5sec)
 Cycle mode (2,4÷2,5 V/cell)
 Max.charge current.....9,9 A
 Temperature correction factor.....30 mV/°C
 Standby mode (2,27÷2,3 V/cell)
 Temperature correction factor.....20 mV/°C

Application

- Safety system
- Electronic Cash Registers (ECR)
- Electronic test equipment
- Emergency light systems
- Geophysical and geodetic equipment
- Control and access systems

Performance & characteristics

- AGM technology allows to recombine 99% of the generated gas;
- No restrictions on air transportation;
- Compliance with the UL requirements;
- Lead plates, alloyed by calcium, provide high energy density;
- Maintenance-free. Do not require distillate topping;
- Long service life;
- The battery case is made of flame-retardant ABS

Dimensions (±2mm)



Length, mm.....197
 Width, mm.....130
 Height, mm.....159
 Height over terminals, mm.....175
 Weight (±3%), kg.....10,1

Layout
B



Terminal type

Fasten 6 mm/Insert Ø6



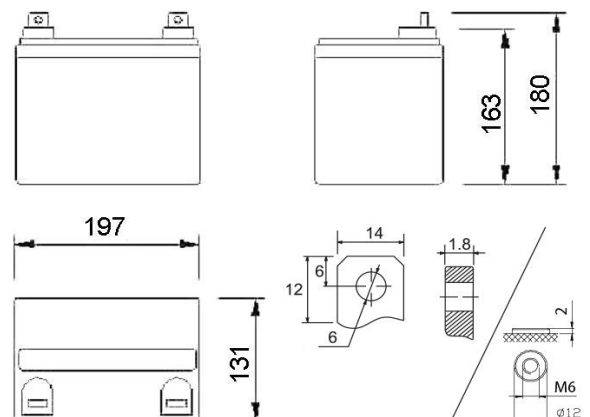



Discharge Constant Current, A (25°C)

V/cell	5 min	10 min	15 min	30 min	1 h	3 h	5 h	10 h	20 h
1,60	116	78,9	57,8	34,7	21,8	9,01	6,30	3,33	1,67
1,65	104	73,5	56,1	33,6	21,7	8,97	6,24	3,28	1,67
1,70	98,6	70,3	54,1	33,0	21,7	8,97	6,24	3,25	1,66
1,75	87,8	64,5	51,2	32,4	21,5	8,91	6,19	3,16	1,65
1,80	79,2	60,0	48,9	31,4	21,2	8,87	6,14	3,14	1,62

Discharge Constant Power, W/cell (25°C)

V/cell	5 min	10 min	15 min	30 min	1 h	3 h	5 h	10 h	20 h
1,60	190	134	102	65,4	42,9	17,3	12,0	6,60	3,35
1,65	180	129	101	64,0	41,5	17,3	12,0	6,52	3,30
1,70	169	126	100	62,3	40,4	17,3	12,0	6,43	3,31
1,75	157	117	93,7	60,7	40,0	17,0	11,9	6,32	3,29
1,80	141	107	88,1	59,0	39,3	16,8	11,7	6,25	3,23

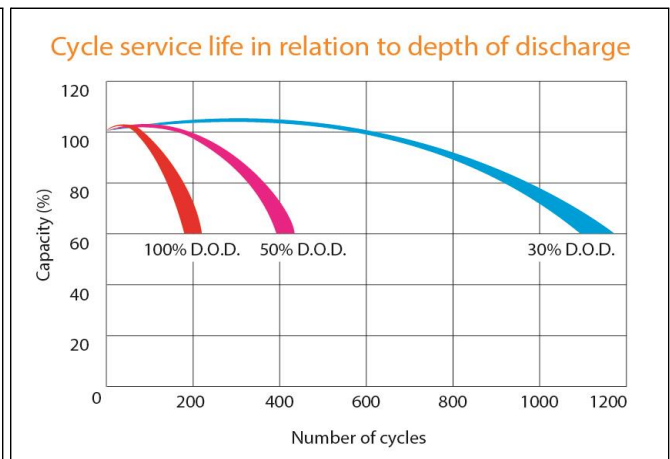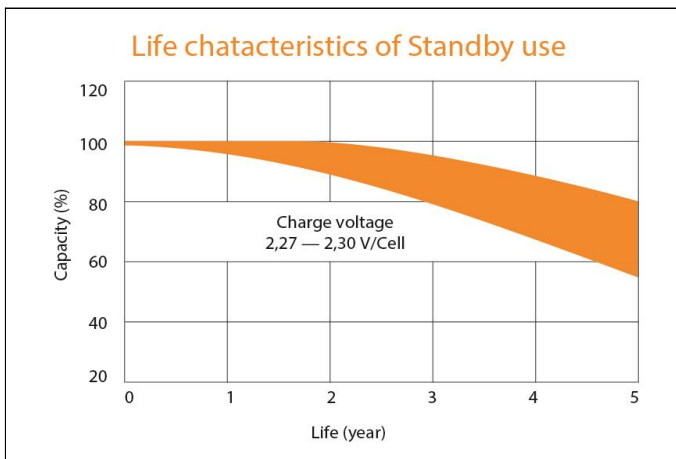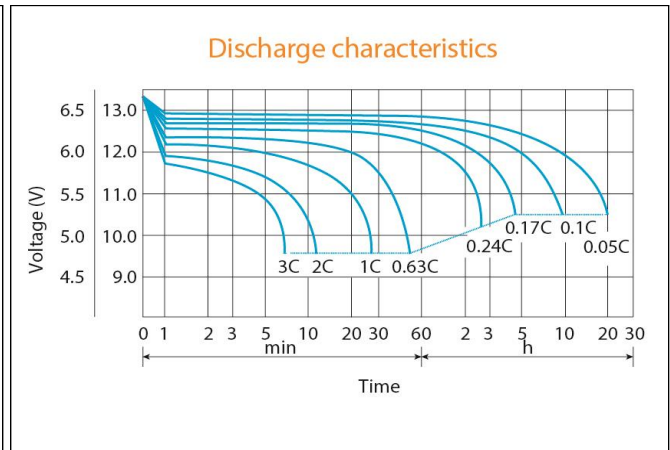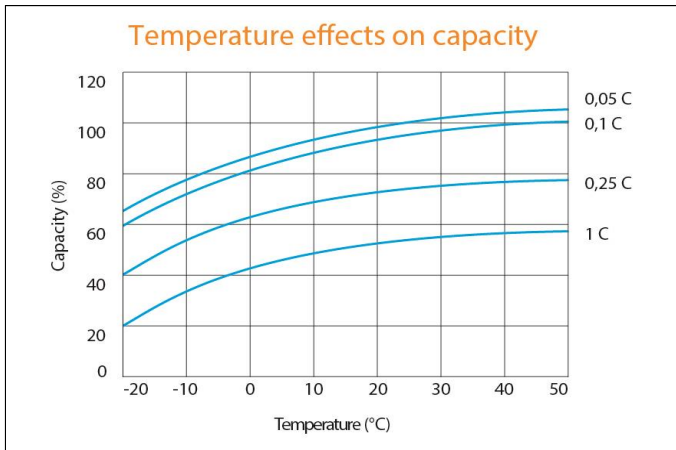

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE